

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 August 2005 (25.08.2005)

PCT

(10) International Publication Number
WO 2005/077660 A2

(51) International Patent Classification⁷: **B41J 3/00**

(74) Agent: CIPRIANI, Guido; C & C Brevetti e Marchi s.r.l.,
Via Prisciano, 28, I-00136 Roma (IT).

(21) International Application Number:
PCT/IT2005/000074

(22) International Filing Date: 15 February 2005 (15.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
RM2004A000083 16 February 2004 (16.02.2004) IT

(71) Applicant (for all designated States except US): ALGO-
TECH SISTEMI S.R.L. [IT/IT]; Via Appia Nuova, 59,
I-00183 Roma (IT).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MY, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(72) Inventor; and
(75) Inventor/Applicant (for US only): TOPANI, Fabio
[IT/IT]; Via Ildebrando Vivanti, 12, I-00144 Roma (IT).

(54) Title: SEMIAUTOMATIC ELECTRONIC PRINTER

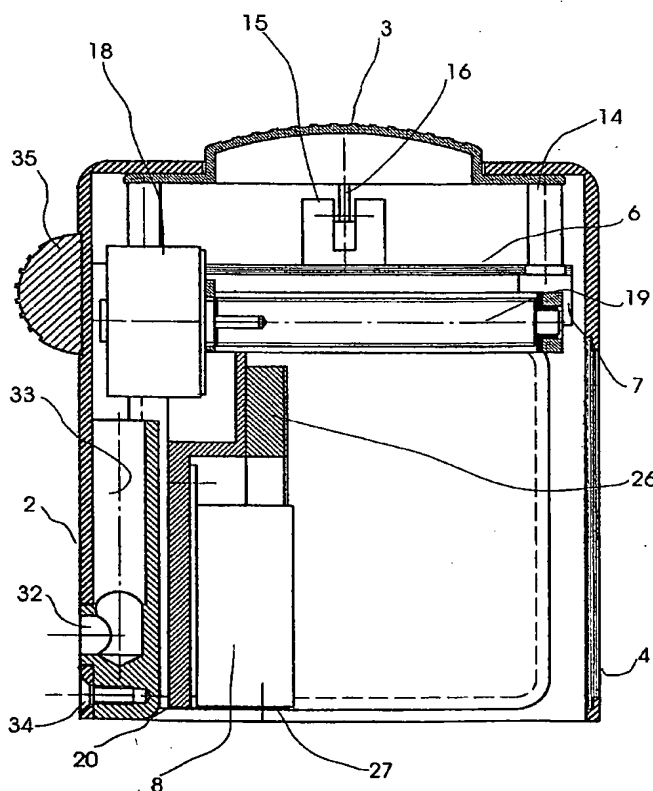

(57) Abstract: A semiautomatic electronic printer comprises a housing (2) and, internally, a print head (8). A push-button (3), projecting upwards from the housing (2), is rigidly connected to a frame (7), which is mounted in a spring-charged relationship inside the housing (2) in such a manner to be vertically movable between a rest position and a working one. The frame (7) sustains in the upper part a printed circuit board including a microprocessor for acquiring from a separate computer data that have to be printed, and for storing such data, as well as for controlling the operation of the print head (8), supported by a carriage (20), with its inferior part being brought to touch the medium to be printed when the push-button is pushed downwards and to translate horizontally after the printing of a line of dots until a desired imaging made of a dot matrix has been printed on the all printing surface.

WO 2005/077660 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *without international search report and to be republished upon receipt of that report*